

# TURBO 160

ELECTROMECHANICAL GEAR MOTOR FOR SLIDING GATES UP TO 1600 Kg, 230 Vac



## PLUS


With slowdown function both in opening and closing to preserve gate integrity

Electronic and mechanical parts well protected from external agents


Easy maintenance thanks to the horizontal control unit position

With fixing plate included


With 230 Vac control unit CT102 (pag. 136 for technical details)

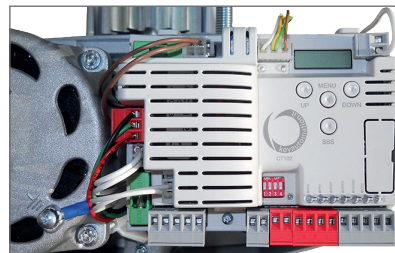

LCD display

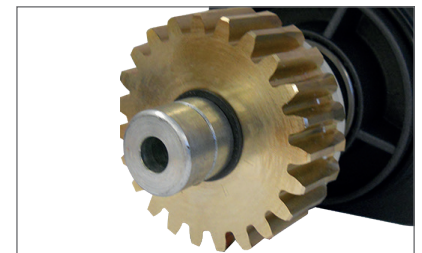

Bronze gears

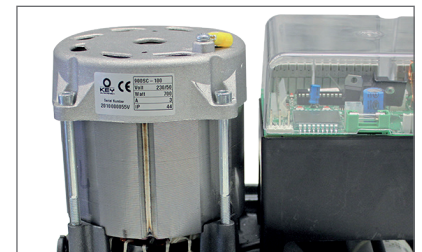

Sturdy and performing motors

# MODELS

| CODE  | DESCRIPTION   | PCS PALLET |
|-------|---|------------|
| SC162 | For sliding gates up to 1600 Kg, 230 Vac motor, control unit with slowdown and electric limit switch (1 pc) | 36         |

## SC162

### MECHANICAL DATA

|               |      |    |
|---------------|------|----|
| speed         | cm/s | 16 |
| torque        | Nm   | 40 |
| working cycle | %    | 30 |

### ELECTRICAL DATA

|                  |     |       |
|------------------|-----|-------|
| control board    |     | CT102 |
| power            | Vac | 230   |
| consumption      | A   | 2,5   |
| absorbed power   | W   | 600   |
| capacitor        | µF  | 20    |
| thermoprotection | °C  | 150   |

### GENERIC DATA

|                        |    |                 |
|------------------------|----|-----------------|
| protection degree      | IP | 44              |
| dimensions (L - D - H) | mm | 320 - 184 - 260 |
| weight                 | kg | 14,5            |
| working temperature    | °C | -20 + 55        |
| gate maximum weight    | Kg | 1600            |

## ACCESSORIES



### CREM-12

M4 zinc coated  
rack 30x12 mm  
L=1000 mm

PACK OF 4 PCS

### TS

Warning board

PC 1