

IN-838




IN-835



IN-838-2



IN-835-2

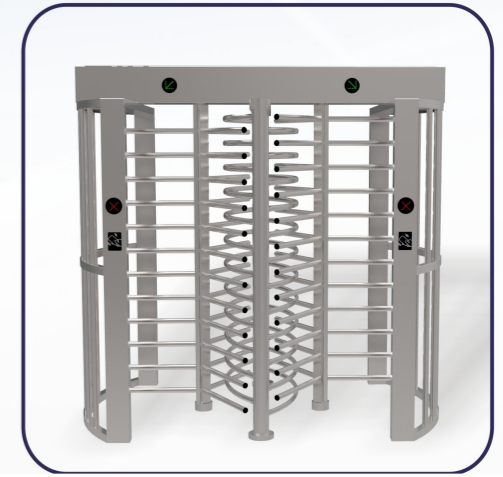

Technical data:

1. Size: 1400x1200x2310mm;
2. Unlock time: 0.2s ;
3. Pass rate: 30person /min;
4. Pass width: ≤650mm;
5. Input : 100V~240V;
6. Driving voltage: 24v;
7. Environment: -25~+70°C;
8. Power consumption: 30w;
9. Input: 12v dry contact.

Technical data:

1. Size: 1630x1500x2310mm;
2. Unlock time: 0.2s ;
3. Pass rate: 30person /min;
4. Pass width: ≤650mm;
5. Input : 100V~240V;
6. Driving voltage: 24v;
7. Environment: -25~+70°C;
8. Power consumption: 30w;
9. Input: 12v dry contact.

Technical data:

1. Size: 2100x1500x2310mm;
2. Unlock time: 0.2s ;
3. Pass rate: 30person /min;
4. Pass width: ≤650mm;
5. Input : 100V~240V;
6. Driving voltage: 24v;
7. Environment: -25~+70°C;
8. Power consumption: 30w;
9. Input: 12v dry contact.

Technical data:

1. Size: 2400x1500x2310mm;
2. Unlock time: 0.2s ;
3. Pass rate: 30person /min;
4. Pass width: ≤650mm;
5. Input : 100V~240V;
6. Driving voltage: 24v;
7. Environment: -25~+70°C;
8. Power consumption: 30w;
9. Input: 12v dry contact.

